


**The  
Complete  
Computer  
Room  
Security  
Program  
includes the ...**

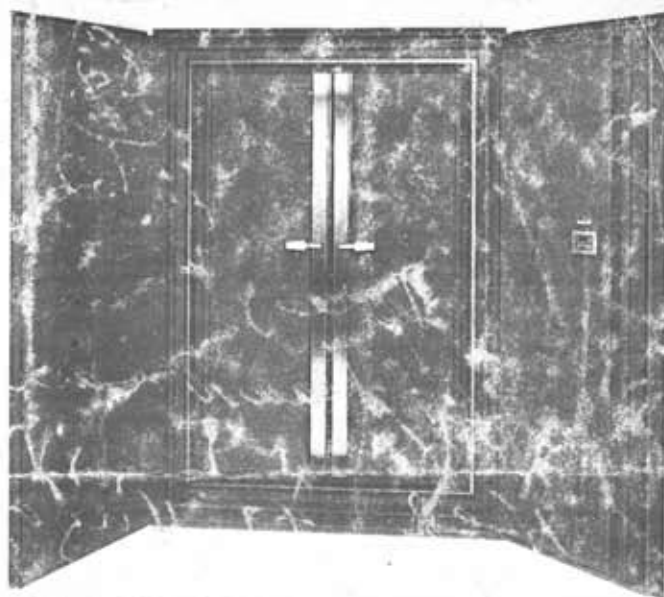

# **DIEBOLD® 4-HOUR DATA-SAFE**

Diebold Data-Safe's unique "safe-within-a-safe" construction has withstood extensive testing by Underwriters' Laboratories, and still protected its contents of data tapes, disk packs and other computer media against a raging fire, with accompanying heat, smoke and humidity.

During these tests, in the U.L. testing furnace, the Data-Safe's internal temperature remained below the maximum allowable limit of 150° F., while the relative humidity remained under 85 percent. In addition to fire and heat endurance tests, the Diebold® Data-Safe™ passed the explosion test and the impact test as specified by U.L.

Also, in tests made by our laboratories, the Data-Safe protected its tapes against magnetic force produced by a powerful magnet placed against the exterior of the safe.

Steel exterior and U.L. Listed combination locks discourage theft and vandalism.

## **FOR STORAGE OF EDP MEDIA**

- *TESTED PROTECTION AGAINST FIRE, HEAT, HUMIDITY, SMOKE, MAGNETIC FORCE*
- *FLEXIBLE INTERIOR*
- *HIGH CAPACITY*

## **OPTIMUM CAPACITIES—FLEXIBLE INTERIORS FOR TODAY'S AND TOMORROW'S NEEDS**

The Data-Safe's interior can be arranged (and rearranged) to house a significant quantity of data tapes, disk packs and other EDP media. It can also be arranged to house a combination of different media in the same safe. You can also provide for today's needs, with the possibility of changing

| MODEL | OUTSIDE DIMENSIONS<br>(Inches) |      |       | INSIDE DIMENSIONS<br>(Inches) |      |      | WEIGHT<br>EMPTY |
|-------|--------------------------------|------|-------|-------------------------------|------|------|-----------------|
|       | HIGH                           | WIDE | DEEP  | HIGH                          | WIDE | DEEP |                 |
| 4094  | 56½                            | 56½* | 34½** | 39                            | 38½  | 16½  | 3250 LBS        |
| 4095  | 80                             | 56½* | 34½** | 62½                           | 38½  | 16½  | 4150 LBS        |
| 4096  | 80                             | 65*  | 34½** | 62½                           | 47½  | 16½  | 4900 LBS        |

