


2, 4, AND 6 HOUR DOORS

LABELS: Underwriters' Laboratories fire resistive rating label and Relocking Device label.

INSURANCE: Class "B" Mercantile Burglary Insurance.

WALL OPENING: See details at right.

ADJUSTABLE WALL FRAME: The adjustable wall frame eliminates the problem of making the wall to fit the door frame. This feature can save many dollars in installation costs. (See "e" dimensions in schedule.)



PANIC BAR ESCAPE MECHANISM: The Panic Bar Escape Mechanism is designed to prevent forced or accidental lock-in. No handles to turn. No knobs to twist. Just push on the panic bar to open the door.

FINISH: Diebold Textured Gray, Green, or Tan. Bolt handle and dial of modern design in chrome.


RECOMMENDED USE: 2 HOUR DOOR MODEL NO. 2085 or 2086; 4 HOUR DOOR MODEL NO. 4085 or 4086; 6 HOUR DOOR MODEL NO. 6085 Fire-insulated Vault Door should be specified for vaults in buildings rated as a 2 hour, 4 hour, or 6 hour fire risk by the Diebold Fire Hazard Analysis Chart.

ARCHITECTS' SUGGESTED SPECIFICATIONS

"The contractor shall furnish and/or install Diebold Model No. 2085 or 2086 (2 hour), 4085 or 4086 (4 hour), or 6085 (6 hour) (right or left swing), flat sill, Fire-insulated Vault Door(s) bearing a 2, 4 or 6 hour label of the Underwriters' Laboratories, Inc. and the Underwriters' Laboratories, Inc., approved Relocking Device label for a relocking device designed to deadlock the door when the lock is under mechanical, explosive, or torch attack. The door shall have a clear opening of 78" high by 32" wide for Models 2085, 4085, and 6085 and 78" high by 40" wide for Models 2086, and 4086. The entrance of the door is flush with the finished floor level. Door and frame shall be filled with MONOLITE, a fire resistive insulation. The door shall be 4" thick on edge and locked by 10, 3/4" diameter bolts checked by 3 tumbler, key changing combination locks. The door shall be provided with a panic release bar for emergency escape. Doors are equipped with 3 offset roller bearing hinges. The door shall be erected according to the manufacturers' installation instructions." Finish is Textured Gray.

MODEL	CLASS	A	B	C	D	E	4HPG. WT.
2085	2 HR.	46 1/2"	32"	44"	39 1/2"	7 1/2" TO 9"	830
2086	2 HR.	54 1/2"	40"	52"	47 1/2"	7 1/2" TO 9"	990
4085	4 HR.	46 1/2"	32"	44"	39 1/2"	10" TO 11 1/2"	900
4086	4 HR.	54 1/2"	40"	52"	47 1/2"	10" TO 11 1/2"	1020
6085	6 HR.	46 1/2"	32"	44"	39 1/2"	10" TO 11 1/2"	1120

11.1/Die

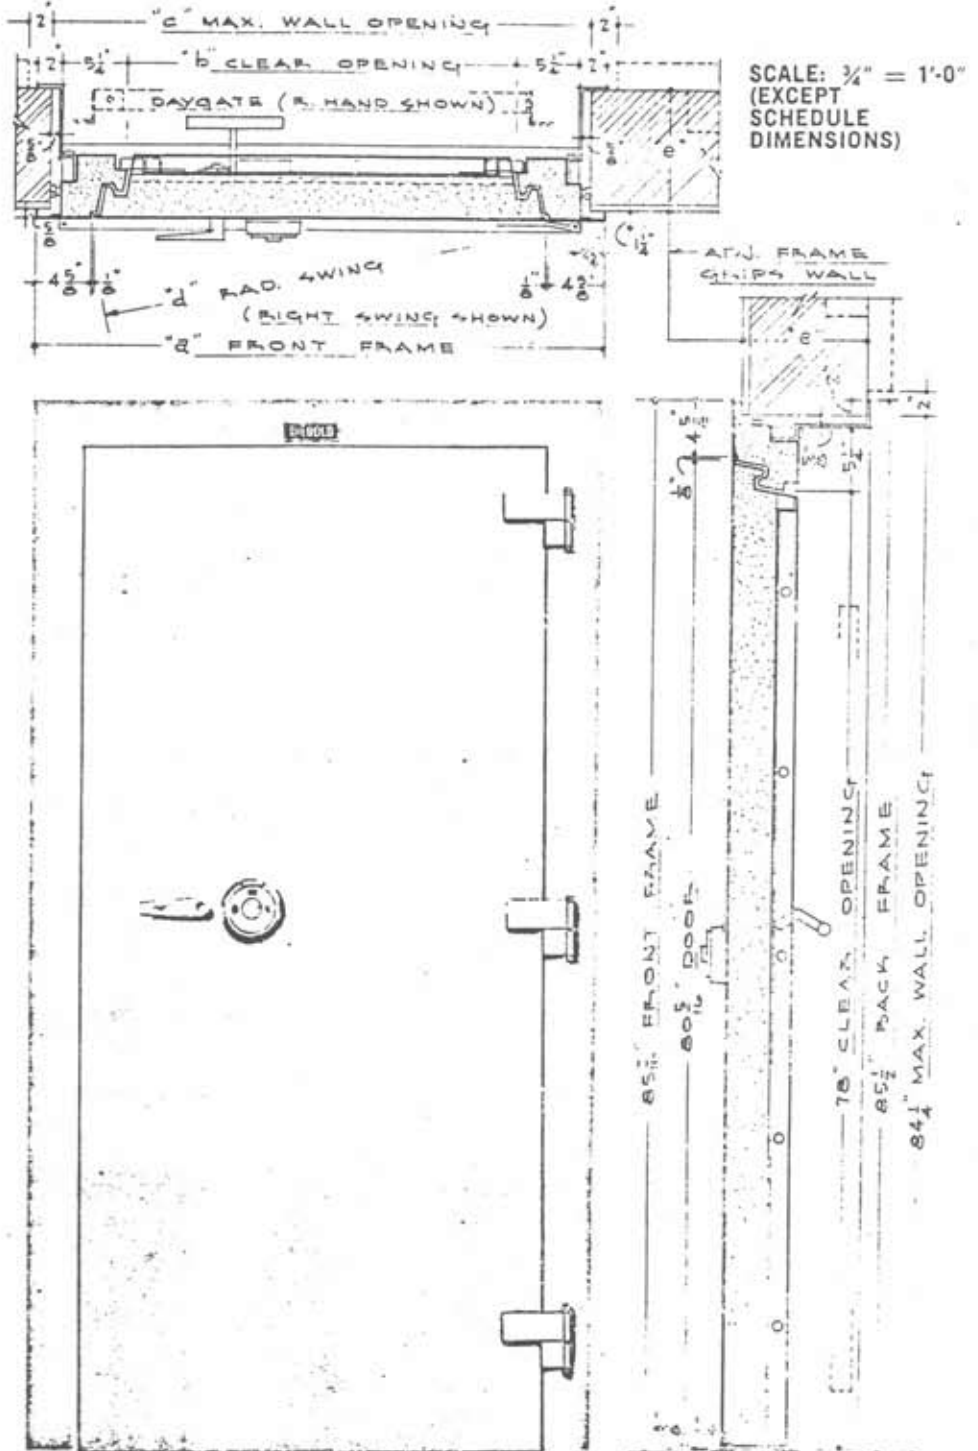

DIEBOLD VAULT DOORS

ENGINEERED IN A 114 YEAR TRADITION OF CRAFTSMANSHIP