

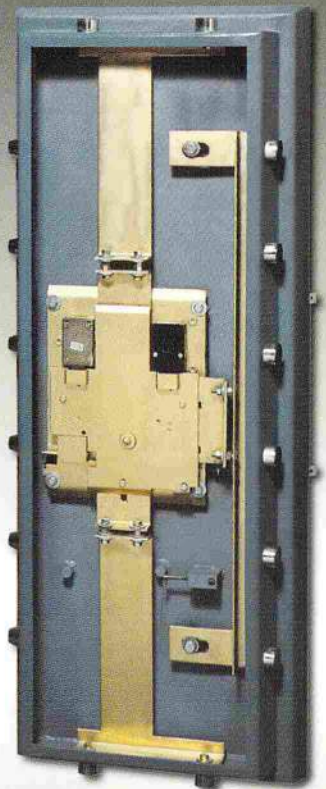


ISM

BULLION UL TL-30

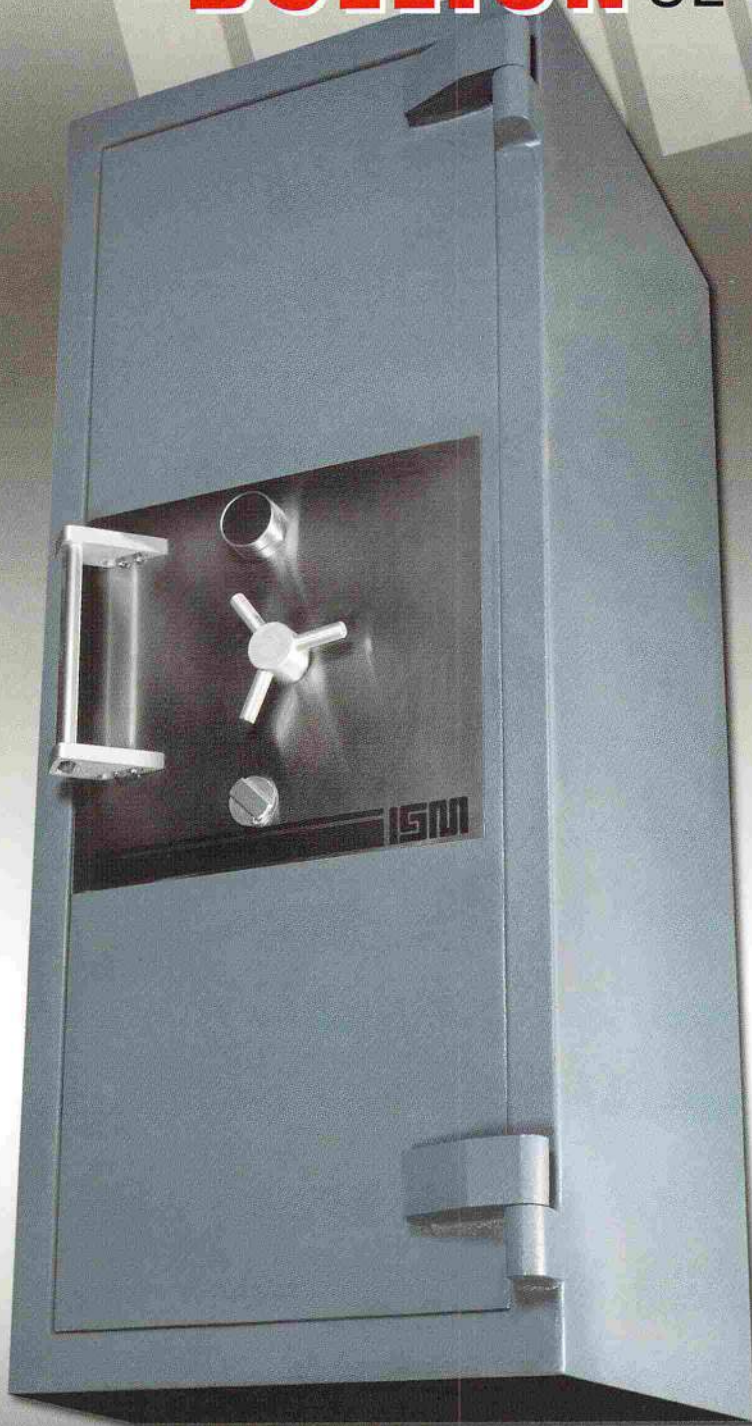

WITH A UL TRTL 30X6
APPROVED BOLTWORK MECHANISM.



"We don't just meet the standards: we create them"



BULLION UL TL-30

SIX-SIDED COMPOSITE PLUS SUPERIOR FIRE PROTECTION

SPECIAL FEATURER


- ◆ 2 HOUR, 350° FACTORY FIRE RATING. TESTED AT TEMP UP TO 1850°F FOR A PERIOD OF 2 HOURS. INTERIOR TEMP DID NOT EXCEED 350° F.
- ◆ EXTRA-STRENGTH. SIX-SIDED PROTECTION AGAINST CONCENTRATED ATTACKS WITH MECHANICAL AND ELECTRICAL TOOLS.
- ◆ SUPERIOR CONSTRUCTION QUALITY OF MORE COSTLY UNITS AT AN AFFORDABLE PRICE.
- ◆ DOOR BARRIER THICKNESS OF 3.54".
- ◆ NEW DIMENSIONS THAT ALLOW MODELS TO FIT THROUGH NARROW DOORWAYS AND INTO TIGHT SPACES.

DOOR

- ◆ FULL 7.1" THICK.
- ◆ CONSTRUCTED OF OUTER AND INNER STEEL PLATES ELECTRICALLY WELDED TOGETHER AND ENCLOSING A THICK CASTING OF CS-650 MONOLITHIC ANTI-PENETRATION COMPOSITE MATERIAL.

BODY

- ◆ COMPLETELY TAILORED ONE-PIECE CASTING OF ISM'S ADVANCED, 3" - THICK CS-650 MONOLITHIC ANTI-PENETRATION COMPOSITE MATERIAL
- ◆ REINFORCEMENT OF THE HIGH-DENSITY CS-650 WITH AN ANTI-PENETRATION ALLOY GRID, STEEL PROFILES.
- ◆ REINFORCEMENT OF BOLTWORK AREA WITH SPECIAL ALLOY INSULATION.
- ◆ ENCASEMENT OF CS-650 MONOLITH IN ELECTRICALLY WELDED STEEL PLATES, MAKING UP TOTAL THICKNESS OF 3.54.

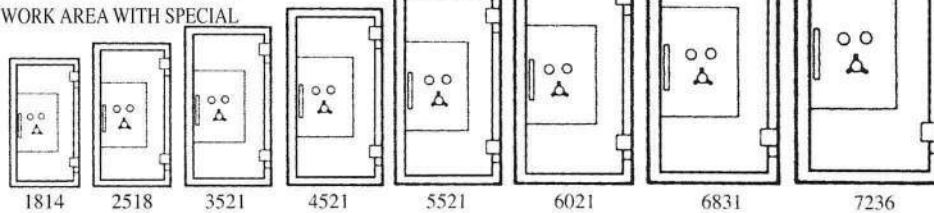

LOCKS

- ◆ TWO LOCKS: A UL GROUP II COMBINATION LOCK AND A MAXIMUM-SECURITY KEY LOCK (2 BIT + 2 STEMS)
- ◆ LOCKING MECHANISM INCLUDES SPECIAL MATERIAL WHICH PROTECTS AGAINST SOPHISTICATED DRILLING FROM ALL DIRECTION


BOLTWORK&LOCKING MECHANISMS

- ◆ THREE-WAY ACTIVE BOLTWORK, WITH A UL TRTL30X6 APPROVED BUILT IN HIGH TECH SECURITY ENGINEERING.
- ◆ BOLT DETENT SYSTEM THAT FURTHER SECURES ENTIRE BOLTWORK MECHANISM, PROTECTING BOLTS WHEN DOOR IS OPEN.
- ◆ GLASS PLATE PROTECTION ON ALL LOCKS AND IN ALL VITAL MECHANISM AREAS. SO THAT, WHEN DOOR IS ATTACKED, GLASS WILL SHATTER, ACTIVATING A DOUBLE RELOCKING MECHANISM AND CROSS-LOCKING THE BOLTS.



INTERIOR FITTING

- ◆ ADJUSTABLE, REMOVABLE SHELVES
- ◆ CUSTOM INTERIOR LOCKERS -(OPTIONAL)



MODEL	INSIDE DIMENSION			OUTSIDE DIMENSION			VOLUME Cuft	Est. WEIGHT Lbs	SHELVES	DOOR SWING			
	Height	Width	Depth	Height	Width	Depth				MODEL	A	B	C
BU181412	18	14	12	25	21	24	1.9	930	1	BU181412	14	42.7	36.6
BU251816	25	18	16	32	25	28	4.2	1376	2	BU251816	18	51.2	44.9
BU352120	35	21	20	42	28	32	8.5	2267	3	BU352120	21	57.9	50.8
BU352420	35	24	20	42	31	32	9.8	2416	3	BU352420	21	57.9	50.8
BU452120	45	21	20	52	28	32	11	2792	4	BU452120	21	57.9	50.8
BU552120	55	21	20	62	28	32	13.4	3148	5	BU552120	24	61	57
BU552420	55	24	20	62	31	32	15.8	3268	5	BU552420	21	57.9	50.8
BU602120	60	21	20	67	28	32	15.4	3406	6	BU602120	34	71	76.8
BU603418	60	34	18	67	41	30	24.5	3750	6	BU603418	32	67	72.8
BU633218	63	32	18	70	39	30	24.2	3750	6	BU633218	31	65.9	70.9
BU652818	65	28	18	72	35	30	21.2	3600	6	BU652818	36	76.2	81
BU653622	65	36	22	72	43	34	30	4422	6	BU653622	24	61	57
BU683120	68	31	20	75	38	32	25.6	4545	6	BU683120	28	65.2	65.4
BU723625.5	72	36	25.5	79	43	37.5	39.3	5355	6	BU723625.5	36	75.2	81.5