

# ISM

## ISM Jewel Guard Mk3

U.L. TL-30

ISM's Jewel Guard Mk3 has proven itself as a best seller in the U.S.A. and one can find it in all high quality jewelry shops. It has unique burglary protection features as well as ease of operation and an excellent finish. All qualities one finds only in much higher priced safes.



**Door**  
The overall thickness of the Jewel Guard door is 150 mm (6"). The door's materials incorporate outer and inner 10 mm (0.4") thick steel plates continuously welded together that enclose a 30 mm (1.2") thick casting of C.N.A., ISM's superior torch and drill resistant composite material. The C.N.A. was developed by ISM to withstand all forms of attack by force, drills, and oxyacetylene cutters. It consists of a tough thermal resistant cast alloy within which a consistently staggered drill resistant alloy multi-grid is incorporated, covering the whole area of the door.

### Body

The Jewel Guard Mk3's body is made of 25 mm (1") thick high strength steel plates continuously electrically welded together and then hand grinded to give an extremely fine finish.

### Locks

The Jewel Guard Mk3 safe is equipped with a U.L. listed group 1 Manipulation Proof combination lock with a key locking dial.

### Boltwork

The boltwork and locking mechanism were designed to give maximum protection against explosive attacks from all directions. The safe has a three way active boltwork plus an additional double action locking mechanism. Fixed bolts lock the hinge side of the door.


### Relocking Devices

The lock and vital mechanism areas are protected by a special glass plate which if tampered with releases a relocker independent of the lock. This provides the safe with a maximum security deterrent.


### Interior Fittings

Adjustable/removable shelves are available for setting up the safe interior to accept trays for jewelry, cash, and other valuables.


# ISM Jewel Guard Mk3 Dimensions and Weights




FS2424




FS3024




FS4024



FS5224



FS6034




FS7235

Model	Inside Dimensions (mm/in)			Outside Dimensions (mm/in)			Volume (Lt /Cu In )	Est. Weight (Kg/Lbs)
	Height	Width	Depth	Height	Width*	Depth**		
FS2424	610 24.0	610 24.0	515 20.3	660 26.0	660 26.0	680 26.8	111 11693	550 1210
FS3024	760 29.9	610 24.0	515 20.3	810 31.9	660 26.0	680 26.8	239 14567	630 1385
FS4024	1015 40.0	610 24.0	515 20.3	1065 50.0	660 26.0	680 26.8	319 19488	770 1695
FS5224	1320 52.0	610 24.0	515 20.3	1370 54.0	660 26.0	680 26.8	415 25334	940 2070
FS6034	1510 59.4	865 34.1	515 20.3	1560 61.4	915 36.0	680 26.8	673 41118	1300 2860
FS7235	1830 72.0	890 35.0	665 26.2	1880 74.0	940 37.0	830 32.7	1083 66024	1700 3740

\* Add 15 mm. to outside width for hinges.

\*\* Add 50 mm to outside depth for handle

## Door Swing Projections

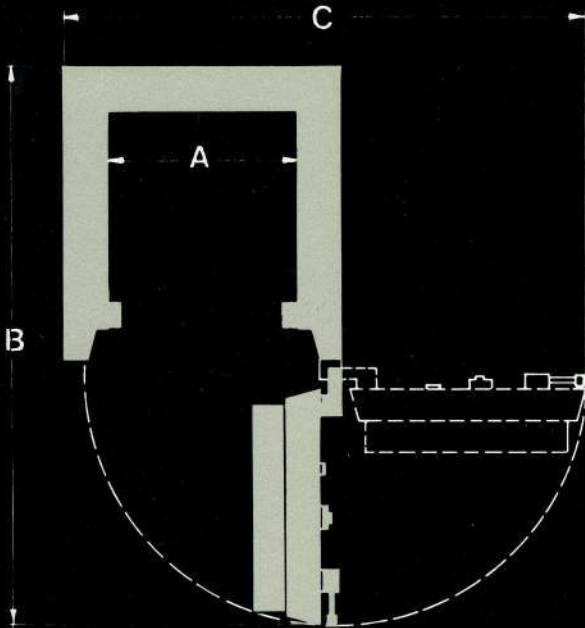

## Door Swing Dimensions

Model	A	B	C
FS2424	610 24.0	1340 52.8	1285 50.6
FS3024	610 24.0	1340 52.8	1285 50.6
FS4024	610 24.0	1340 52.8	1285 50.6
FS5224	610 24.0	1340 52.8	1285 50.6
FS6034	865 34.1	1595 62.8	1795 70.7
FS7235	890 35.0	1770 69.7	1845 72.6

In line with our policy to provide the best in security, ISM reserves the right to incorporate any improvements and alter any specifications without prior notice.

