

International DualVault

Six-Sided Protection plus Fire Protection

Composite Construction All Six Sides

The massive 4 inch door and 3 inch thick body incorporate a six-sided composite design using tough high-density concrete and steel matrix assuring both fire and burglary protection.

Interior

Adjustable shelves in 1/2" increments on all models complemented by a removable, keylocking drawer.

Locking Bolts

Massive 1" locking bolts are activated with a convenient L-handle.



Hinges

The door pivots on dependable ball-bearing hinges protected by an interior fixed locking bar.

U.L. Approved Combination Lock

Key changable, UL Group II combination lock is protected by two positive anti-attack relocking devices, triggered to engage when the safe is attacked.


Keylock

High security 7-level keylock adds convenience to day security in addition to superior nighttime burglary defence.

MODEL DV300

The International DualVault is designed to offer commercial and residential users the same type of uncompromising security available on our highest security safes. It incorporates many of the same features while remaining affordable. The DualVault: superior protection against both burglary and fire.



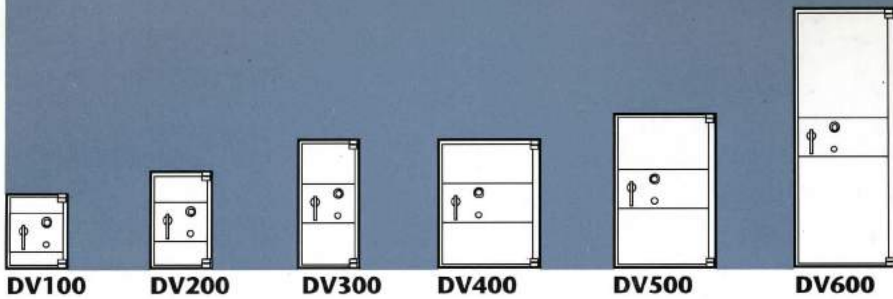

DV100 DV200 DV300 DV400 DV500 DV600

International DualVault

MODEL	Internal Diameter/In.			External Diameter/In.			Weight Lbs.	Capacity Cu. Ft.	Drawers/Shelves
	H	W	D	H	W	D*			
DV100 [†]	14	12	12	20	18	19½	455	1.16	0/1
DV200	19	12	12	25	18	19½	515	1.58	1/1
DV300	25	12	12	31	18	19½	765	2.08	1/1
DV400	25	20	21	31	26	29½	1285	6.07	1/1
DV500	30	20	21	36	26	29½	1485	7.29	1/2
DV600	59	20	21	65	26	29½	1950	14.34	1/3


*Add 1¼" to depth for handle projection

We reserve the right to alter any specifications or make any improvements without prior notice.

[†]DV100 is not supplied with a keylocking drawer.

Door Swing Dimensions

MODEL	Door Swings		
	A	B	C
DV100	12	35	32
DV200	12	35	32
DV300	12	35	32
DV400	20	52½	47½
DV500	20	52½	47½
DV600	20	52½	47½

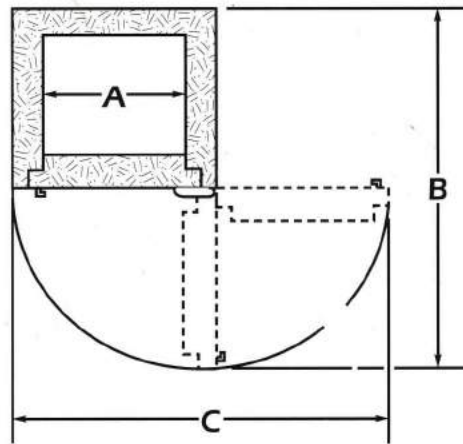

Distributed By:

The International DualVault has been Laboratory tested to meet or exceed the following label:

