

# INTERNATIONAL FORTRESS TL-30 V8

## **Six-sided Composite Protection Plus 2-Hour Fire Protection**

The International Fortress TL-30 V8, six-sided composite construction offers a revolutionary new barrier material incorporating a steel and ceramic matrix on all six sides of the safe. The ceramic matrix is anchored by a "Z" bar connection system that makes the inner and outer layers of steel as well as the composite material as one. By using this unique construction, the safe achieves a high degree of burglary protection while being relatively light in weight.

### **Door and Body**

The door and body are constructed of inner and outer layers of steel electrically welded together incorporating our superior composite material in conjunction with a steel and ceramic matrix to resist all forms of attack.

### **Boltwork**

The massive 1.5" chrome plated bolts are secured with dual Underwriters Laboratories Group 2M combination locks. Optional high security keylocks or electronic combination locks can be added. All locks are protected by a tempered glass plate that activates the relocking system during an attack. The boltwork is further protected by bolt detent system that automatically extends the bolts when the door is closed.


### **Fire Protection**

Exclusive to the V8 Series is an intumescent gasket that expands by 10 times its size to seal the connection between the door and the body to help prevent the transfer of heat to the interior of the safe. The safe has been factory tested and has achieved a 2 hour fire rating.



# International Fortress TL-30 V8

## Specifications

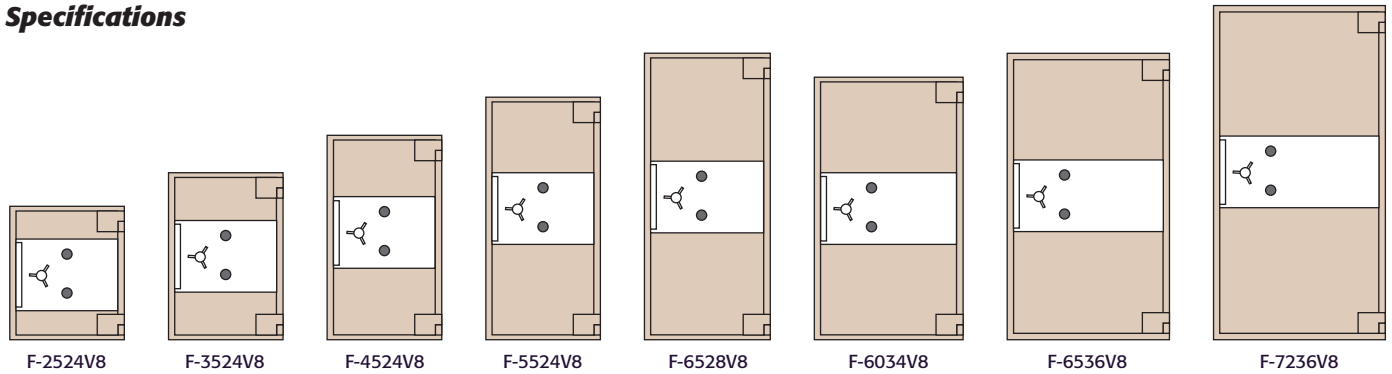


**Dimensions and Weights** (Add 2" to exterior depth for hinge projection. Add 2" to exterior depth for removeable handle projection.)

Model	Interior H x W x D (in)	Exterior H x W x D (in)	Weight (lbs)	Capacity (cu ft)	Shelves
F-2524V8	25 x 24 x 20	29 x 28 x 28	1,390	6.9	1
F-3524V8	35 x 24 x 20	39 x 28 x 28	1,755	9.7	2
F-4524V8	45 x 24 x 20	49 x 28 x 28	2,055	12.5	3
F-5524V8	55 x 24 x 20	59 x 28 x 28	2,465	15.3	4
F-6528V8	65 x 28 x 20	69 x 32 x 28	3,130	21.1	5
F-6034V8	60 x 34 x 20	64 x 38 x 28	3,340	23.6	5
F-6536V8	65 x 36 x 22	69 x 40 x 30	3,720	29.7	5
F-6536XV8	65 x 36 x 26	69 x 40 x 34	3,920	35.2	5
F-7236V8	72 x 36 x 26	76 x 40 x 34	4,220	39	5

## Door Swing Dimensions

Model	Dimensions (in)		
	A	B	C
F-2524V8	24	54.5	52.5
F-3524V8	24	54.5	52.5
F-4524V8	24	54.5	52.5
F-5524V8	24	54.5	52.5
F-6528V8	28	58.5	60
F-6034V8	34	64.5	71
F-6536V8	36	66.5	76
F-6536XV8	36	72.5	76
F-7236V8	36	72.5	76

## Door Swing Projections

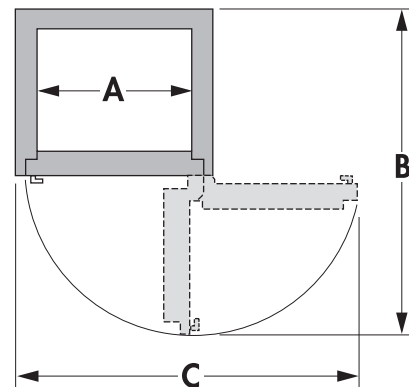

**Distributed By:**

