



SLS

CASH SAFES

2500 RANGE



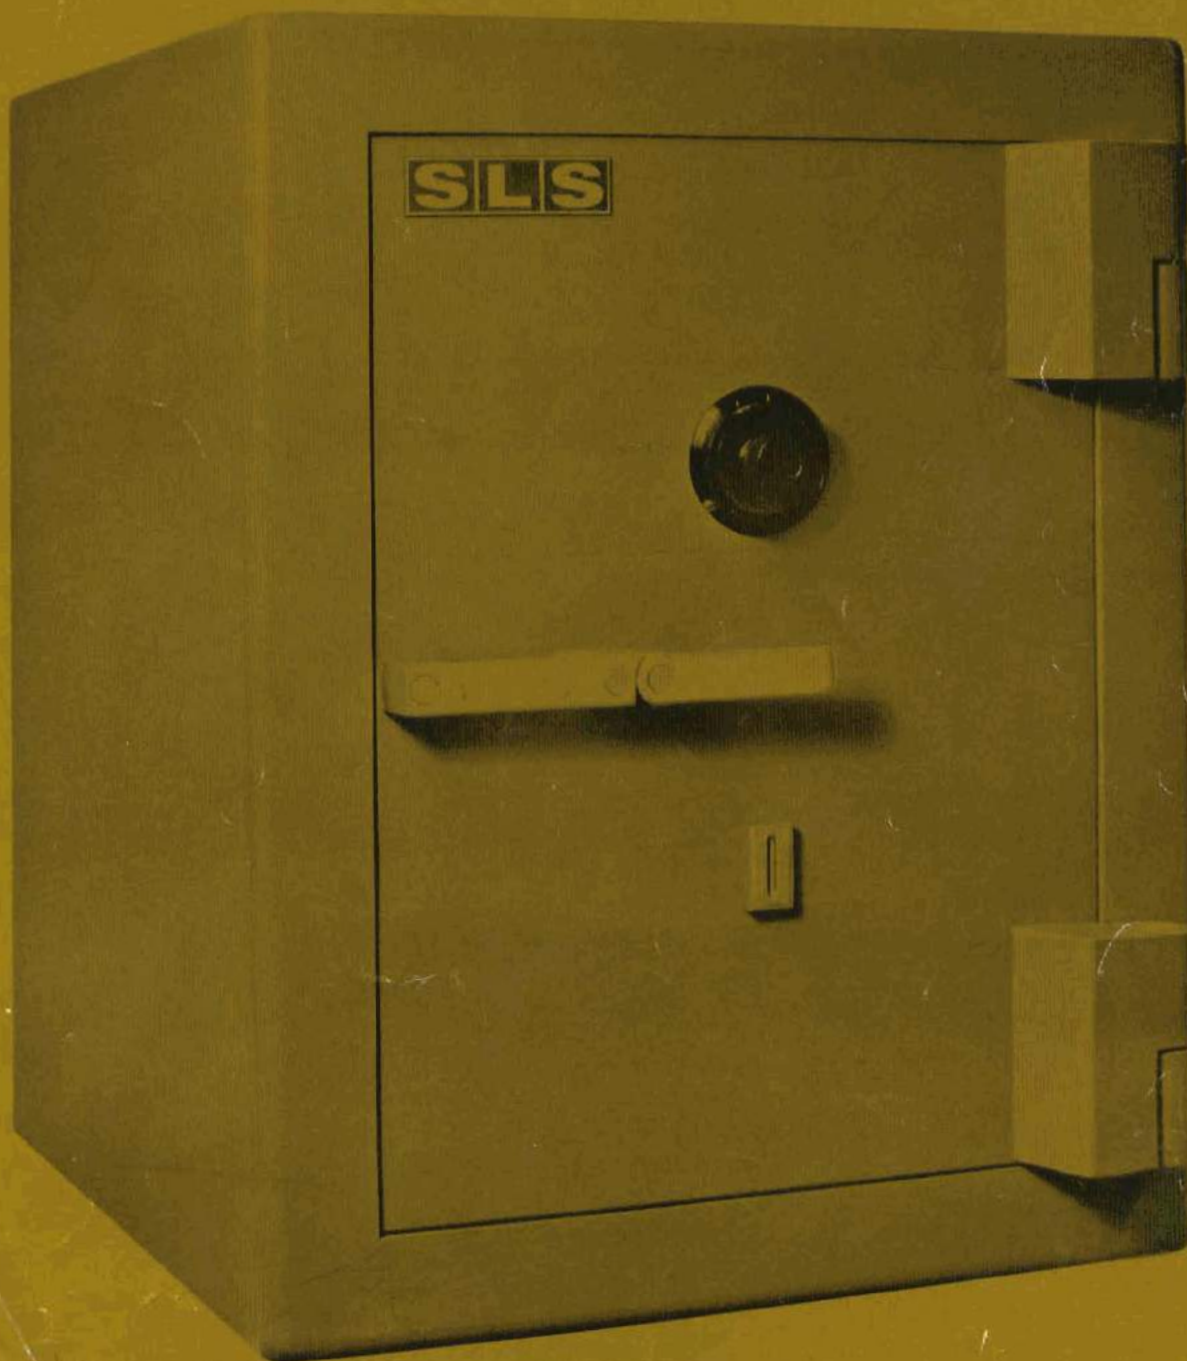


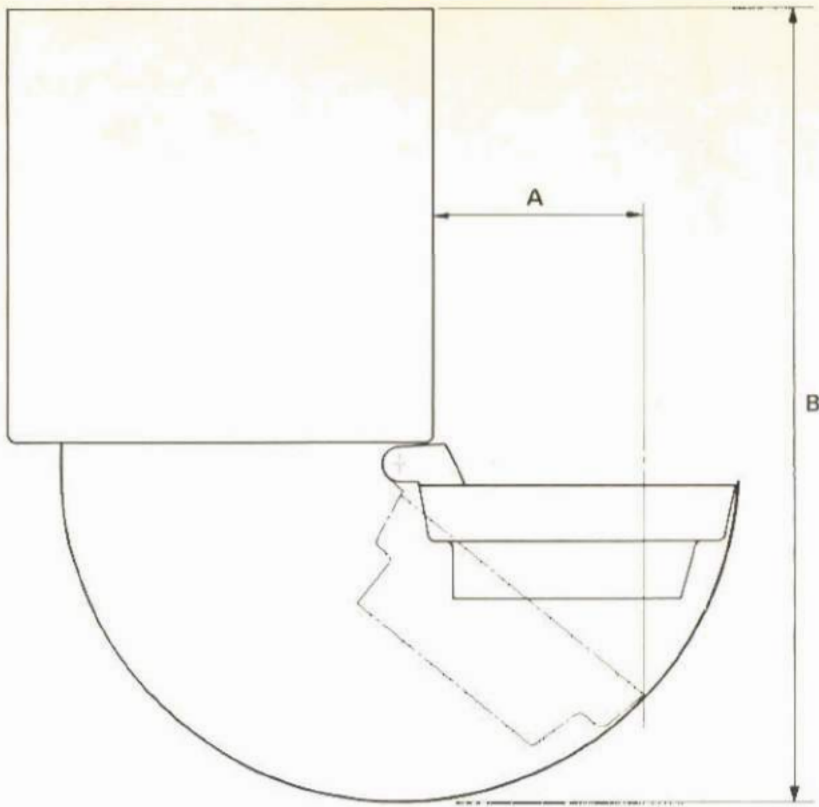

Minimum dimension for drawer withdrawal

Total depth of safe with door open

	A	B
Size 1814	12" 305 mm	45" 1144 mm
Size 2316	13" 330mm	49½" 1258mm
Size 3520	16" 407mm	56½" 1435mm
Size 5020	16" 407mm	56½" 1435mm

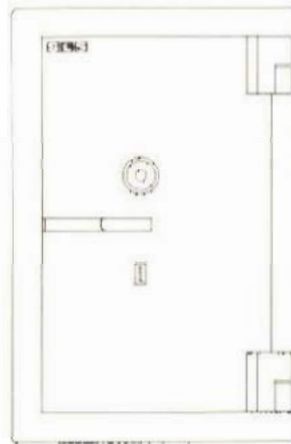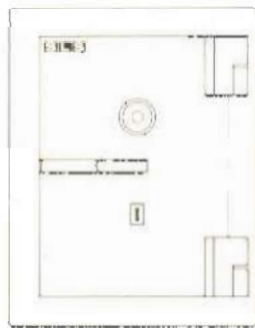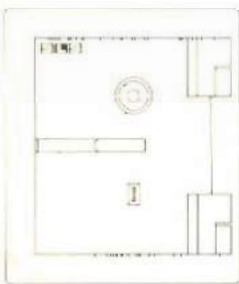

DIMENSIONS

MODEL	INTERNAL SIZES			EXTERNAL SIZES			WT
	H.	W.	D.	H.	W.	D.	
S.L.S.2500							
1814	18½" 470mm	14½" 369mm	13" 330mm	28" 712mm	24" 610mm	24½" 623mm	11½ cwt 583 Kg
2316	23" 585mm	16" 407mm	16" 407mm	32½" 826mm	25½" 648mm	27½" 700mm	15 cwt 762 Kg
3520	35" 890mm	20" 508mm	19" 483mm	44½" 1130mm	29½" 750mm	30½" 775mm	28 cwt 1422 Kg
5020	50" 1270mm	20" 508mm	19" 483mm	59½" 1510mm	29½" 750mm	30¼" 775mm	39 cwt 1982 Kg

Add 2½" (64mm) for Total depth over handle.