

• INTERSEC

Nordic Safe

TRTL-30



 **Tann**

INTERSEC Nordic Safe TRTL-30


6-Sided protection against all known forms of attack including. . .

- Explosives
- High speed carbide drills
- Oxy-arc
- Wedging
- Oxy-acetylene
- Heavy hand tools

PLUS: **2-Hour Official Fire Protection label.**

Here's the safe you've been waiting for — INTERSEC Nordic! Burglary and fire protection in one unit. Now that's protection!

By passing the rigorous tests of both Underwriters' Laboratories and the Swedish Standards Association, the Nordic Safe has rightly earned its position as one of the highest rated security units in the world. The Nordic bears the UL TRTL-30 label and qualifies for the National Bureau of Casualty Underwriters Insurance rate "H" under Mercantile Safe policies, and rate "G" for Broad Form and Bank policies. The Nordic also displays the Class A120 certification by the Swedish Standards Association recognizing officially tested fire resistance for a duration of 2 hours in a furnace with temperatures up to 1850° F. (1010° C.)

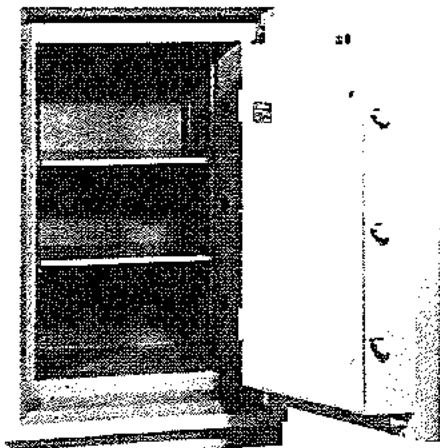

Construction:

Door:

Security is immediately evident in the design of the INTERSEC Nordic Series. The massive 5-1/4 inch thick rectangular door is recessed within the body of the safe to resist prying and tool assaults. Unlike most safe doors the hinges are not exposed to potential attack but are actually an integral part of the safe's body. The door itself comprises an extremely tough alloy and massive monolithic barrier designed to resist all known types of attack including torch, tools and high speed drills.

DIMENSION (INCHES)

Model No.	INTERNAL			EXTERNAL			Approx. Weight LBS.
	High	Wide	Deep	High	Wide	Deep	
900B	35½	19½	19¾	49	30½	34¾	3600
1200B	47½	19½	19¾	61	30½	34¾	4400
1500B	59	19½	19¾	72	30½	34¾	5200

Designed and printed by New Ideas Printing and Direct Mail, Miami, Florida.

Additional door security includes the use of glass mounted anti-explosive, drilling and thermal relocking devices, Sargent & Greenleaf (Group 1) tamper-resistant, manipulation proof combination locks and four-way boltwork.

Locking:

Standard on the Nordic Safe is one Sargent & Greenleaf (Group 1) tamper-resistant, manipulation proof combination lock, and four-way boltwork.

Body:

The body construction of the INTERSEC Nordic is specially designed to resist delamination and attack by incorporating a strongly reinforced steel grid of rod and Z-bars. Also within the body's 5 inch thick walls are special alloys and an extra-dense ceramic material to thwart all known forms of assault.

Anchoring:

Each safe is designed with the facility to incorporate full security anchorage if desired.

Alarm:

Provision for alarm is provided as standard.


Finish:

The INTERSEC Nordic Series is beautifully finished in a textured sand-grey with steel-blue fascia and polished chrome fittings.

In a continuing effort to improve our products and meet the changing requirements, we reserve the right to make changes without notice in specifications, models and design.

In a continuing effort to improve our products and meet the changing requirements, we reserve the right to make changes without notice in specifications, models and design.

MANUFACTURED IN SWEDEN BY THE JOHN TANN SECURITY GROUP.

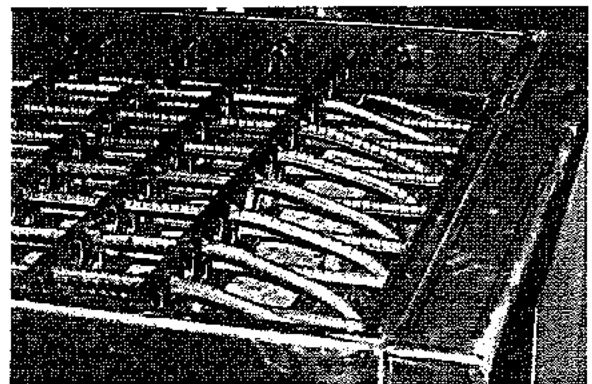

An impressive steel grid forms just one of the many lines of defense in the body build-up completely shrouding the main dense monolithic core of aluminum corund casting.

INTERSEC

INTERCONTINENTAL SECURITY PRODUCTS INC.

EMPIRE SAFE

6 EAST 39th STREET, NEW YORK, N.Y. 10016

(212) 684-2255

FAX: (212) 684-5550